




MAGDUOCP

Call Point for MAGDUO

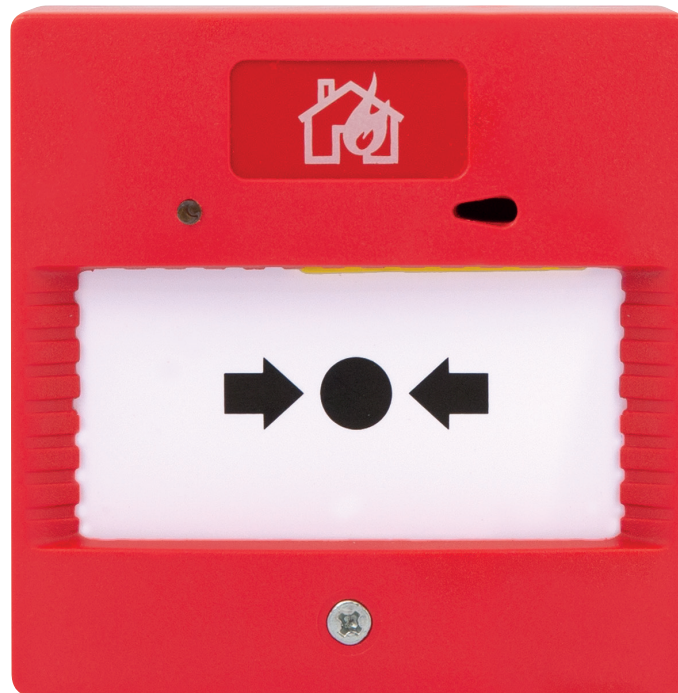

- Resettable manual call point
- Built-in End of Line function
- Device base included

Dimensions

Width	87mm
Height	87mm
Flush	25mm
Surface Depth	53mm

Temperature Range

Operating Temperature	-10°C to +50°C
-----------------------	----------------

Voltage Ranges

DC Output from Mains Powered Panel	25.5 to 35V DC
DC Output from Battery Powered Panel	20 to 26V DC

Operating Current (Typical)

Quiescent	50 uA
End of line ON if applicable (in addition to Quiescent)	720 uA
Alarm Activated	16.5 mA

LED Operation

Alarm Indication	Pulsed twice per second
EOL indication	5 second interval

Device Loading Units

Max Loading Units per Zone	160 DLU
MAGDUO MCP	16.0 DLU

Ingress Protection

IP Rating	IP 21C
-----------	--------