

Not Equivalent - Better!

Our Intruder Alarm cable is manufactured to British & European standards required by BS 4737 & DD CLS/TS EN 50131-7:2010 and insulated with high grade PVC to EN 50363-4-1 for assured flexibility.

The Pro-Supreme, Standard and Classic cable ranges are specifically designed & tailored to suit the individual performance and price requirements of contractors installing and servicing domestic & light commercial systems up to high security & large commercial alarm markets requiring cabling to BS 4737 levels.

NEW

PRO-SUPREME BS 4737 Highest Grade Tinned Copper

Features

- ▶ Resistance Value Lower than 95 Ohms Per KM
- ▶ Resistance Values Comply with requirements of BS 4737
- ▶ Tinned and Annealed Copper Wire for Flexibility
- ▶ Conductors Formed with 7 strands Tinned Copper
- ▶ Strong Lead Free PVC Outer Sheath, Insulated to meet EN 50363-4-1
- ▶ Easy to Strip and Flexible to use
- ▶ Available in White, Brown & Black Outer Sheaths
- ▶ Available in 100m & 500m reels
- ▶ 4, 6, 8 & 12 Core Profiled Cables

Screened

- ▶ Available with Aluminium Foil Screening
- ▶ Additional Separate Earth Core
- ▶ A Strong Polyester Backed Aluminium foil to Reduce Radio Frequency Interference

Low Smoke & Fume

- ▶ Oxygen Index Level - >32%
- ▶ Acid Emissions Level - <10%

PRO-STANDARD Highest Grade Tinned Copper

Features

- ▶ Resistance Approx. 115 Ohms Per KM (+/- 5%)
- ▶ Tinned Conductors for Flexibility and Durability
- ▶ Conductors Formed with 7 strands Tinned Copper
- ▶ High Quality PVC to meet EN 50363-4-1
- ▶ Easy to Strip and Flexible to use
- ▶ Available in 100m & 500m reels
- ▶ Available in White & Brown Outer Sheaths
- ▶ 4, 6, 8 & 12 Core Profiled Cables


PRO-CLASSIC High Grade Tinned Copper

Features

- ▶ Resistance Approx. 130 Ohms Per KM (+/- 5%)
- ▶ Easy to Strip and Flexible to use
- ▶ Available in 100m & 500m reels
- ▶ Available in White & Brown Outer Sheaths
- ▶ 4, 6, 8 & 12 Core Profiled Cables

Features

- Available on 100m & 500m Reels
- White & Brown Sheath Ex Stock
- Black Sheath by Special order
- All Materials RoHS compliant
- Lead & Tin Free Outer Sheath
- 4, 6, 8 and 12 Core Types
- All Cables Include a Strong Nylon Ripcord

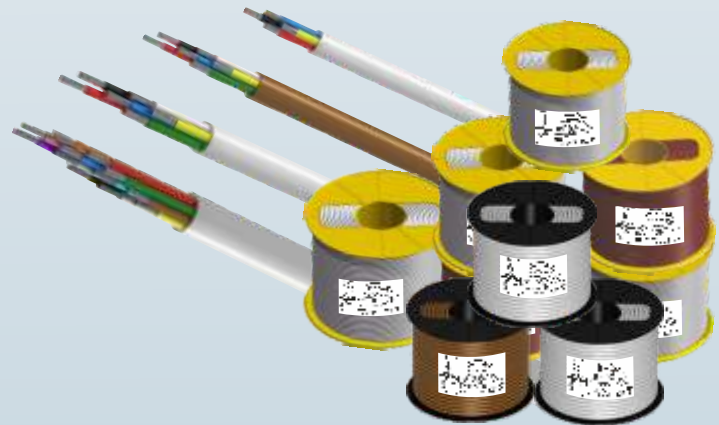

NO Coated Aluminium!
Full Copper Cable Now at a Similar Cost!

Our light bunching process minimises accidental cable distress when pulling through and during cable installation fixing.



Ventcroft Ltd. Faraday Road, Astmoor Industrial Estate, Runcorn,
Cheshire, WA7 1PE, United Kingdom. Tel: +44 (0)1928 581098, Fax: +44 (0)1928 581099

www.ventcroft.co.uk



Manufactured in
United Kingdom

Ventcroft and the Ventcroft Device are Registered Trade Marks of Ventcroft Ltd.

E&OE



VA 159 Version:1.8 Issued:29/05/2015