

# RoLP LX Wall

Sounder Beacon

VANDERBILT



The RoLP LX Wall base is ideal for dual use applications where a visual alarm device is required in addition to an audible alarm. Recommended for wall use and requiring just one installation point.

- Ultra-low current consumption
- RoLP and RoLP Maxi sounder options
- Up to 7.5m coverage volume (switchable to 2.5m)
- 0.5Hz or 1Hz Flash rate


# RoLP LX Wall

Sounder Beacon

VANDERBILT

## Benefits

- Use where current consumption is a key consideration
- Delivering up to 106dB(A) sound output
- Ideal for bedrooms, bathroom and toilets
- Switch flash rate to 0.5Hz to reduce current consumption

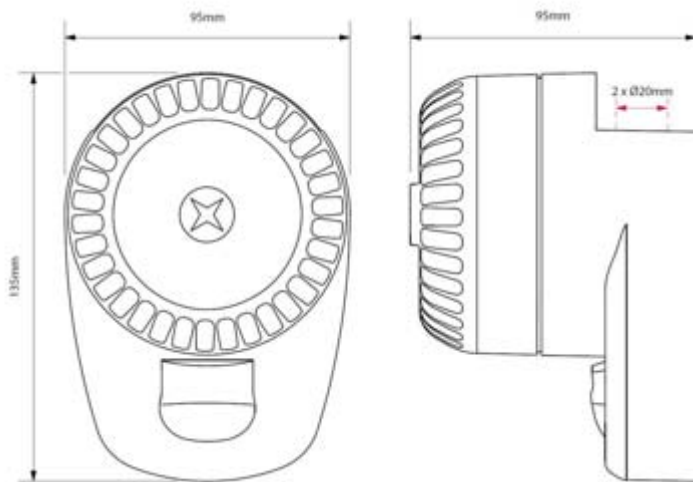

# RoLP LX Wall

## Sounder Beacon

VANDERBILT

■ Technical Specifications	
Mounting Type	Wall
Voltage	18 – 28VDC (Fire Use) 9 – 15 VDC (First Use)
Current	22 – 37mA dependent on setting (Sounder and beacon; tone 3)
Coverage (y)	7.5m (Switchable to 2.5m)
Mounting Height (x)	2.4m (max)
Coverage Volume Code	W-2.4-7.5
Coverage Volume	135m <sup>3</sup> (15m <sup>3</sup> )
Sound Output	106 dB Max
Flash Rate	1Hz (Switchable to 0.5Hz)
Operating Temperature	-25°C...+70°C
Monitoring	Reserve Polarity
Protection	IP65
Weight	200g

■ Ordering Information			
Type	Art-No.	Description	Weight
RoLP-LX-R	N54539-Z284-A100	Sounder beacon, wall, red	200g
RoLP-LX-W	N54539-Z284-A200	Sounder beacon, wall, white	200g

VANDERBILT