

Electric Locking Drop Bolt Range




Solenoid Bolt

Technical specifications

- Operating voltage - 12VDC
- Standby current - 250mA
- Operating current - 650mA
- Power to Lock
- Holding force 1000Kg

SB-200LS	200x35x38 (mm)	Monitored Solenoid Bolt	752g (Boxed) / 566g (Unboxed)
----------	----------------	-------------------------	-------------------------------

Other items in the RGL range.

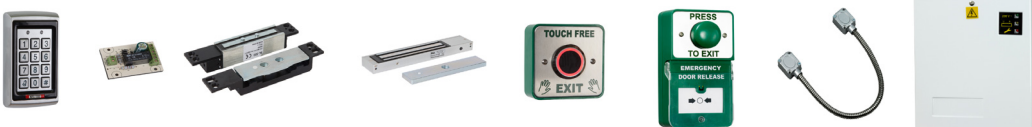

Drop Bolt Range

FEATURES

- Fail-safe operation.
- Delay timer (0/3/6/9) seconds.
- Locking by detector plate.
- Monitored output for door status (NO Pair)
- Suitable for wooden doors.
- Concealed when fitted flush.

