



**ERONE THE SMART LIVING** 433 MHZ AM TRANSMITTERS - KEELOQ® ROLLING CODE


► DESIGN & TECHNOLOGIES FIT FOR ALL YOUR SITE CONFIGURATIONS

**TSW2641E1** Outdoor RF wall switch transmitter - 1 channel




- **Outdoor.**
- **Frequency:** 433,92 MHz.
- **Range:** Up to 800m (Open-field).

- Dimensions (L x W X D): 66,5 x 82 x 66mm.
- Modulation: AM/ASK.
- Encoding: Keeloq® rolling code.
- Effective Radiated Power (E.R.P.): 3 mW.
- 1 channel.
- Input voltage: 230V ac /50 Hz.



CODE	REFERENCE	DESCRIPTION
F100200010	TSW2641E1	433 MHZ OUTDOOR RF WALL TRANSMITTER - 230 V AC - 1 CHANNEL

Wireless wall switch transmitter - 4 channels **SETR2641TM**

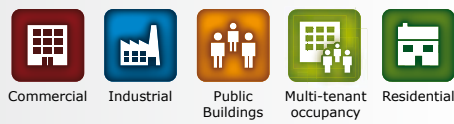

- **Fit for sun-blinds and awnings.**
- **Frequency:** 433.92 MHz.
- **Range:** Up to 200m (Open-field).

- Dimensions (L x W X D): 80 x 80 x 25mm.
- Modulation: AM/ASK.
- Encodage: Code tournant Keeloq®.
- Effective Radiated Power (E.R.P.): 100 to 200 µW.
- 4 channel.
- Input voltage: 3V Battery (CR2032).




CODE	REFERENCE	DESCRIPTION
F100200028	SETR2641TM	433 MHZ RF WALL TRANSMITTER - 4 CHANNELS
C3201P0001	CR2032	3V CR2032 LITHIUM BATTERY

**SETMC1C9V** RF Module - 1 channel



- **Wireless solution for standard contact.**
- **Frequency:** 433.92 MHz.
- **1 channel.**
- **Range:** Up to 1000m (Open-field).

- Dimensions (L x W X D): 45 x 28 x 6mm (battery cable = 200mm).
- Modulation: AM/ASK.
- Encoding: Keeloq® rolling code.
- Effective Radiated Power (E.R.P.): 10 mW.
- input voltage: 9V Battery (6LR61).
- Consumption: 17 mA.



CODE	REFERENCE	DESCRIPTION
F100200024	SETMC1C9V	433 MHZ RF MODULE - 1 CHANNEL 9V

\* Refer to Limited Lifetime Warranty Conditions.