

# SIGNALINE FT-EOL-EN

## EOL ENCLOSURE



Compatible with: Signaline FT-88-EN, FT-78-EN  
IP66 enclosure  
EN54-28:2016 approved  
UV and chemical resistant



# SIGNALINE FT-EOL-EN EOL ENCLOSURE

## SPECIFICATION


<b>Model</b>	Signaline FT-EOL-EN
<b>Dimensions</b>	94 x 94 x 57 mm
<b>Pack weight</b>	0.1 kg
<b>IP rating</b>	IP66
<b>Operating temp.</b>	-35°C to +55°C
<b>Terminal blocks</b>	EOL: 2 x 5 mm Rising Clamp Cable: 2 x removable header 5 mm Rising clamp
<b>Cable glands</b>	2 x IP67 rated glands included
<b>Mounting</b>	Wall mounted 4 x Ø4 mm holes, 79 mm apart
<b>Material</b>	Polycarbonate enclosure with non-ageing polyurethane seal
<b>Colour</b>	Grey (RAL 7035)
<b>Approvals</b>	EN54-28:2016, UL File no.: S24913

The Signaline FT-EOL-EN End-of-Line Unit has been approved to EN54-28:2016 for use with the LocatorPlus-EN Control Unit and FT-78-EN or FT-88-EN Signaline Linear Heat Detection cables.

It is designed to effectively terminate up-to two zones of FT-78-EN or FT-88-EN cable in a secure, weatherproof enclosure.


Furthermore, the built in switches for testing a fault and alarm condition allow the integrity of the whole system to be functionally checked in situ, providing comprehensive testing and maintenance of the system.

Visit [Vimpex.co.uk](http://Vimpex.co.uk) for our full range of heat detection solutions




Signaline FT-EN cable is proudly manufactured in the UK


## Wiring Diagram

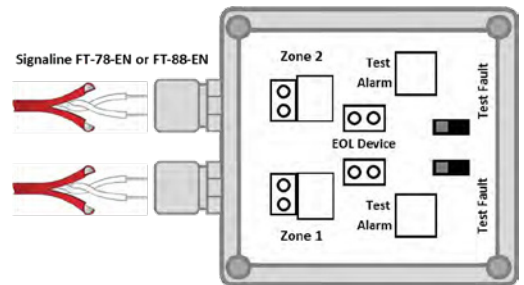

## Conventional Systems

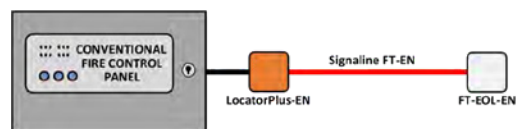

## Addressable Systems

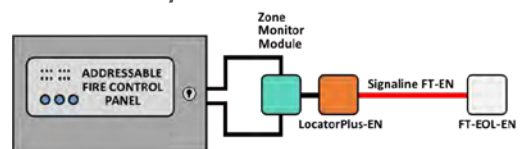

## Hazardous Areas

