

# LED CIRCULAR SURFACE MOUNT PANELS

FOR MODEL: SPC15W-40, SPC15W-60, SPC20W-40, SPC20W-60

## INTRODUCTION

The LED Circular Surface Mount Panel comes with a mounting bracket and a 22cm cable.



## SPECIFICATION

<b>LED</b>		170-265V	4000K / 6000K	80 Ra
1200lm / 1600lm	IP44	IK03	50 / 60Hz	15W / 20W

• Dimensions:

15W: Ø: 200 x D: 40mm

20W: Ø: 240 x D: 40mm

Automatic Circuit Breaker Type	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current (Ampere)	6A	10A	13A	16A	20A	10A	13A	16A	20A
Installation (mm <sup>2</sup> )	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	1.5
15W	50pcs	65pcs	75pcs	100pcs	30pcs	50pcs	65pcs	75pcs	100pcs
20W	30pcs	45pcs	60pcs	70pcs	20pcs	30pcs	45pcs	60pcs	70pcs

- LED: 75pcs / 100pcs of SMD 2835
- Working Temperature: -20°C - 45°C

## BOX CONTENTS

- 1 x LED Circular Surface Mount Panel
- 1 x Driver
- 1 x Cradle
- Screws and Plugs

# LED CIRCULAR SURFACE MOUNT PANELS

FOR MODEL: SPC15W-40, SPC15W-60, SPC20W-40, SPC20W-60

## SAFETY WARNING

- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk.
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit including the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- If the fitting incorporates control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.

## INSTALLATION DIAGRAMS

Figure 1

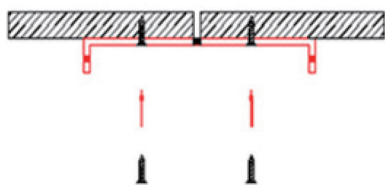


Figure 2


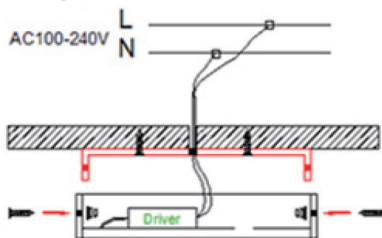


Figure 3



## INSTALLATION INSTRUCTIONS

1. Remove the two screws securing the fitting to the mounting cradle.
2. Install the cradle to the location you have marked (observe orientation of the cradle).
3. Fix securely using the plugs and screws provided.
4. Make the necessary connections to the driver from your incoming supply.
5. Locate the driver in the void in the back of the panel.
6. Align the fitting over the cradle so that the holes match up, insert the two screws to secure.
7. Ensure no wires are trapped.

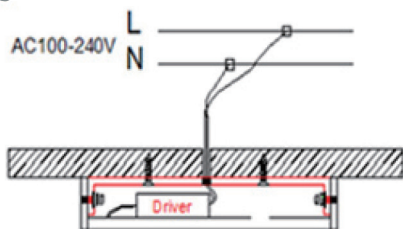

# LED CIRCULAR SURFACE MOUNT PANELS

FOR MODEL: SPC15W-40, SPC15W-60, SPC20W-40, SPC20W-60

---

## MAINTENANCE

When this fitting comes to the end of its life or you choose to replace it, please do not dispose of it with your normal household waste. Please recycle where the facilities exist, check with your local authority or retailer for suitable options.

---

## ADDITIONAL INFORMATION

- 80lm/W.
- GB/T5023.5 0.75mm<sup>2</sup> 22cm Cable included.
- Mounting bracket included.
- White RAL9003 finish.

---

## GUARANTEE

This product is guaranteed for a period of 3 years from the date of purchase. The guarantee is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations (BS7671). The guarantee is also invalidated if the luminaire has been Mega tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

**CE RoHS**

