


## POWER SUPPLIES

► 12V DC WITH BATTERY CHARGER

### BS60 - BS60H - BSM60

12V dc power supplies + battery charger



BS60

OPTION



TH82712V  
Snap-on digital clock  
See page 301.

- **Regulated power supply.**
- **B7AH battery included.**
- **Polycarbonate or metal box.**
- **Primary and secondary protected by fuse.**
- **VO polycarbonate box: fireproof.**
- **Additional AC outputs.**

- Dimensions (L x W x D): 207 x 195 x 120mm.
- Input voltage: 230V ± 10 %, 50/60 Hz.
- Consumption: 0.2A.
- Outputs:
  - main 12V dc regulated, with battery charger.
  - additional 12V ac not with battery charger.
- Maximum output power:
  - 12V dc output, 1.5A.
  - 12V ac output, 0.5A.


RoHS

WEEE

IP30

CE Certification

0°C to +40°C

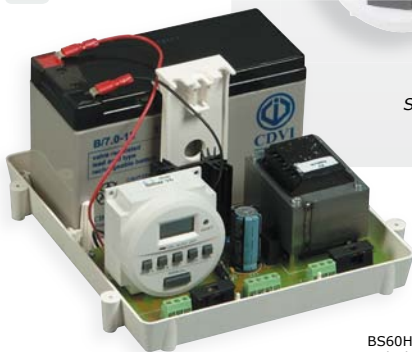

BS60H  
BS60 + TH82712V clock

RoHS

WEEE

IP20

CE Certification

0°C to +40°C



BSM60

CODE	REFERENCE	DESCRIPTION
F030100001	BS60	REGULATED 12V POWER SUPPLY WITH BATTERY CHARGER
F030100002	BS60H	REGULATED 12V POWER SUPPLY WITH BATTERY CHARGER + DIGITAL TIMER
F030100003	BSM60	REGULATED 12V POWER SUPPLY WITH BATTERY CHARGER WITH METAL BOX
F030400003	TH82712V	SNAP-ON DIGITAL TIMER (BS60 ONLY)
C3202B001	B7AH	12V 7.0A/H BATTERY

\* Refer to Limited Lifetime Warranty Conditions.