




1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

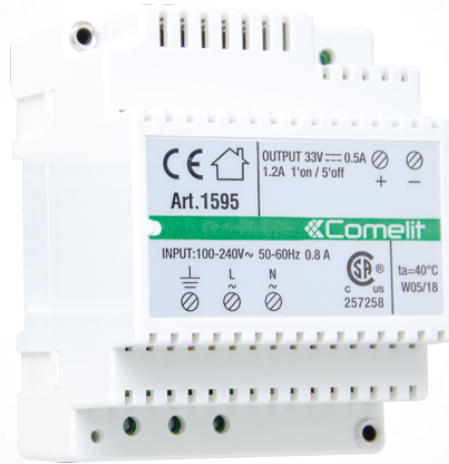

Power supply unit 110-230V input and 33Vdc 500 mA continuous output, and 1.2A inrush current for external unit with IKALL entrance panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).



1595

33VDC POWER SUPPLY UNIT FOR IKALL ENTRANCE PANEL

MAIN FEATURES

Alternating input voltage (VAC):	120÷230
Output voltage (VDC):	33
Applicable to DIN rail:	Yes
Number of DIN modules:	4
Max. current delivered (A):	1.2

GENERAL DATA

Product height (inch):	2.44
Product width (inch):	2.82
Product depth (inch):	3.54
Type of finish:	Plastic
Product colour:	White
Operating temperature (°F):	-4 ÷ 104

COMPATIBILITY

Simplebus Top audio/video system:	Yes
Building Kit audio/video system:	Yes
Simplebus 2 audio system:	Yes
Simplebus 1 audio system:	Yes
Vip system:	Yes
Kit audio/video system:	Yes

ELECTRICAL SPECIFICATIONS

Maximum power delivered (W):	60
------------------------------	----