


1/5 POVERVIEW



#### 6721W

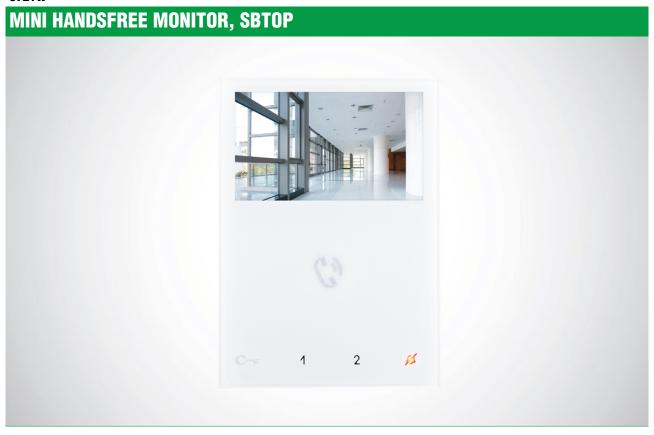

Wall-mounted hands-free monitor with full-duplex audio and 4.3" / 16:9 colour screen. Allows brightness control, plus adjustment of the ringtone volume, which can be customised by choosing one of several different melodies. Equipped as standard with 5 sensitive touch back-lit controls for audio activation, door-opening, self-ignition, switchboard call, privacy service and LED signalling for the door status. Manages floor door calls as standard. Option of adding 3 additional buttons with accessory Art. 6734W. Complete with 2 x 8-position DIP-SWITCH for user code programming and button programming. The wall-mounting or residential series box backplate and riser distribution terminal Art. 1214/2C are included. The monitor can only be used in 2-wire SimplebusTop systems. Dimensions: 115x160x22mm.

#### **AWARDS**









### 6721W

## MINI HANDSFREE MONITOR, SBTOP

MAIN FEATURES	
Wall-mounted:	Yes
Desk base-mounted:	Yes
Hands-free function:	Yes
Type of display:	LCD
Display size (inch):	4,3" 16:9
Display resolution HxV (inch):	480x272
B/W or colour display:	Color
Product colour:	White
Sensitive Touch technology:	Yes
Total buttons:	5
Additional buttons:	3
LED signaling (no.):	3

FUNCTIONS	
Actuator control function:	Yes
Self-ignition:	Yes
Switchboard call function:	Yes
Priority calls:	Yes
Intercom function:	Yes
Selective intercom call:	Yes
Call to multiple addresses:	Yes
Privacy function:	Yes
Doctor:	Yes
Floor door call function:	Yes
Electronic bell:	Yes
Customisable ringtone:	Yes
Privacy conversation function:	Yes
Key button function:	Yes

# HARDWARE SPECIFICATIONS Removable terminals: Yes

SETTINGS	
Loudspeaker volume control:	Yes
Microphone volume control:	Yes
Ringtone volume control:	Yes
Display brightness control:	Yes
Display contrast control:	Yes



### 6721W

## MINI HANDSFREE MONITOR, SBTOP

SETTINGS	
Display colour control:	Yes

GENERAL DATA	
Product height (inch):	6.3
Product width (inch):	4.53
Product depth (inch):	0.87

COMPATIBILITY	
Simplebus Top audio/video system:	Yes
Building Kit audio/video system:	Yes
Kit audio/video system:	Yes

TECHNICAL CHARACTERISTICS	
Power supply voltage:	22 ÷ 28
Minimum current absorption (mA):	2
Maximum current absorption (mA):	325
Loudspeaker:	36mm 400hm 1W
IP protection rating:	IP30
Operating temperature (°F):	41 ÷ 104
RH max operating humidity (%):	25 ÷ 75
Video encoding:	PAL/NTSC
Product weight (oz):	1.18
Clamps:	L L CFP1 CFP2



#### 6721W

## **MINI HANDSFREE MONITOR, SBTOP**

#### ACCESSORIES



#### 6711WV

#### ADAPTER PLATE FOR MINI HANDSFREE

Adapter plate to finish the installation of the Mini Handsfree monitor in case of replacement of flush-mounted or wall-mounted Planux, Smart and Icona monitors. White color. Dimensions: 170x220x3 mm.

#### 6710

#### BACKPLATE AND DISTRIBUTION TERMINAL FOR MINI MONITOR

Wall-mounting or residential series box backplate for MINI monitor, /BM versions with handset featuring magnetic induction for hearing aid wearers. Also includes riser distribution terminal Art. 1214/2C. Dimensions 145x100x4 mm.



#### 6734W

#### ADD. BUTTONS KIT HANDS-FREE MINI MONITOR, WHITE

Accessory for conversion of the monitors of the Mini series Art 6721W and 6721W/BM into 8-button versions. Includes an 8-button faceplate and an electronic module for button activation, which can be installed quickly without the need to open the monitor casing.



#### 6720

#### BRCKT FOR ROUTING EXT. CABLES. HF MINI

Wall support bracket for handsfree Mini monitor allowing thru-routing of external cables. Dimensions:106.3x149.60x19mm.



#### 6720V

#### Bracket for routing Mini HF ViP external cables

Wall bracket for ViP system hands-free Mini monitor; allows through-routing of external cables.



#### 6732A

#### DESK BASE FOR HANDS-FREE MINI MONITOR. SBTOP

Desk base installation accessory for hands-free Mini monitor in Simplebus Top system.



#### 6721W

## MINI HANDSFREE MONITOR, SBTOP

### ACCESSORIES



#### 6732V

#### Desk base for hands-free Mini ViP monitor

Desk base for desktop conversion of ViP system hands-free Mini monitor. Complete with 1x 2 metre cable with RJ45 connector to connect monitor terminals to the coupler or residential series socket.