


DOOR ENTRY SYSTEMS & KITS MINI HANDSET AUDIO

1/4 POVERVIEW



6750W

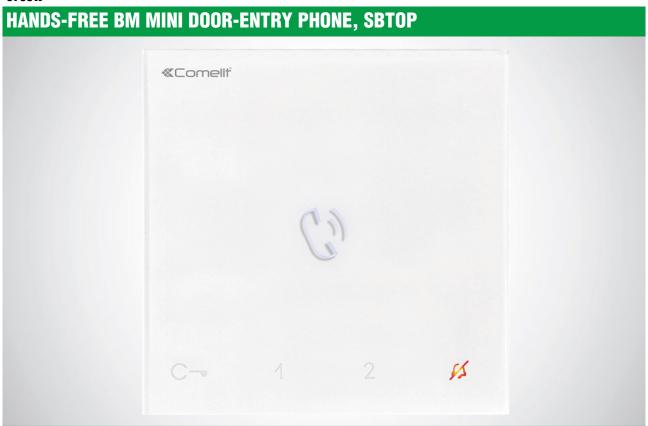



Mini series door-entry phone with full-duplex audio and integrated magnetic induction amplification system. Allows loudspeaker volume control and ringtone volume control, with choice of different melodies. Equipped with 5 touch sensitive buttons for audio key, lock-release, actuator control, switchboard call and privacy function, with door status indicator LED. Manages floor door calls as standard. Complete with 2 x 8-position dip-switches for programming user code and buttons. Wall-mounted. The door-entry phone can be used in SimplebusTop Color 2-wire systems with mixer art. 4888/C, Simplebus2 with power supply art. 1210 or kit that use the power supply art. 1209. Complete with distribution terminal art. 1214/2C. Dimensions: 105x105x20 mm.

AWARDS









6750W

HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP

MAIN FEATURES	
Audio/video system:	Yes
Wall-mounted:	Yes
Desk base-mounted:	Yes
Hands-free function:	Yes
Induction loop function:	Yes
Product colour:	White
Sensitive Touch technology:	Yes
Total buttons:	5
LED signaling (no.):	3

FUNCTIONS	
Actuator control function:	Yes
Switchboard call function:	Yes
Priority calls:	Yes
Intercom function:	Yes
Selective intercom call:	Yes
Call to multiple addresses:	Yes
Privacy function:	Yes
Doctor:	Yes
Floor door call function:	Yes
Electronic bell:	Yes
Customisable ringtone:	Yes
Key button function:	Yes

HARDWARE SPECIFICATIONS	
Removable terminals:	Yes
Type of finish:	Plastic

SETTINGS	
Loudspeaker volume control:	Yes
Ringtone volume control:	Yes

GENERAL DATA	
Product height (mm):	105
Product width (mm):	105
Product depth (mm):	20

COMPATIBILITY	
Simplebus Top audio/video system:	Yes



DOOR ENTRY SYSTEMS & KITS MINI HANDSET AUDIO

6750W

HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP

COMPATIBILITY	
Building Kit audio/video system:	Yes
Kit audio/video system:	Yes

TECHNICAL CHARACTERISTICS	
Power supply voltage (VDC):	22 ÷ 35
Absorption in stand-by (mA):	2
Absorption during communication (mA):	130
IP protection rating:	IP30
Operating temperature (°C):	5 ÷ 40
RH max operating humidity (%):	25 ÷ 75
Product weight (g):	150
Clamps:	L L CFP1 CFP2



DOOR ENTRY SYSTEMS & KITS MINI HANDSET AUDIO



6750W

HANDS-FREE BM MINI DOOR-ENTRY PHONE, SBTOP

ACCESSORIES



6754

Adapter plate for Mini Handsfree audio