

Request to Exit Button Range



Waterproof Exit Button


Technical specifications

- Contacts : Double pole N/O - N/C.
- Output : 4 AMP contact @ 30 V AC/DC.
- Wear resistant legend.
- External use.
- IP66 Rated Housing & Button.

Approval : EN 50133 Industrial Codes of Practice

WP66-G-GB-PTO	60/80x85x86 (mm)	Standard green dome button	PRESS TO OPEN	248g (Boxed) / 200g (Unboxed)
WP66-G-GB-GR	60/80x85x86 (mm)	Standard green dome button	GATE RELEASE	248g (Boxed) / 200g (Unboxed)
WP66-Y-RB-PA	60/80x85x86 (mm)	Standard red dome button	PANIC ALARM	248g (Boxed) / 200g (Unboxed)

Other items in the RGL range.

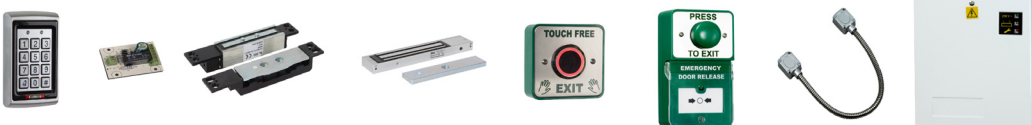

FEATURES

- All plastic large green button.
- Momentary operation.
- High impact plastic back box.
- Can be surface or flush fitting.
- Easy clean surface. Ideal for general/sensitive areas.
- IP66 Weatherproof Back Box.

