




# BIO-MERGE-PX2

## Paxton Integration Software

*BIO-MERGE-PX2 Software enables integration between Paxton Net2 Access Control and our leading range of Virdi Biometric readers. Manage Access Control and Biometrics from within the Paxton Net2 software for simplicity and convenience.*

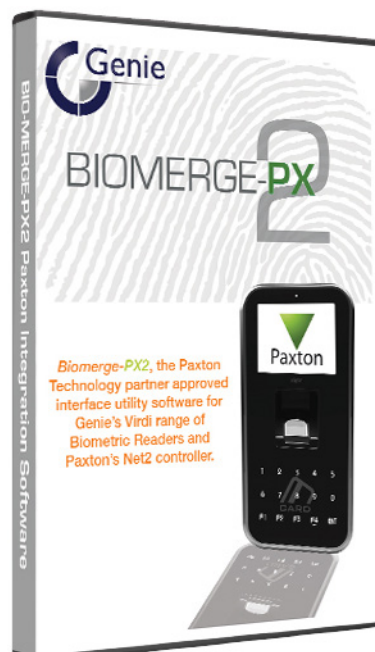

### Key Features

- Integrates with Net2 Software
- Clients Software for Multiple Enrolment Locations
- Automated Fingerprint Enrolment via Net2 Software
- One Time User Enrolment -Avoids the Need for Enrolling on Multiple Systems
- Automatic Database Back Up
- Terminal Restore Utility
- Upload to Selected Terminals - Custom Logos and Firmware
- Advanced Fingerprint Enrolment - Sensitivity Settings
- Select between Multi-Factor Authentication : Finger Only / Finger + Card / Finger or Card / Card Only
- Compatible with AC5000, AC2500, AC2200 and ACF100 Only

### Minimum PC Requirements

Supported Operating Systems	Windows 10 Pro, Windows 8 , Windows 7, Windows Server 2008, Windows Server 2008 R2
Processor	Intel® Pentium® Dual-Core 2.00GHz (or equivalent)
RAM	4GB RAM or greater
Graphics	512 MB PCI2 x16
Paxton Version	V5.00 and above.
Required Additional Hardware	FOH02/USB

### Hardware/Firmware

Virdi AC5000-SC Firmware	10.51.03-000.39
Virdi AC2500-SC Firmware	30.51.09-000.02
Virdi AC2200-SC Firmware	11.61.00-00.05
Virdi ACF100-SC Firmware	10.51.02-000.10/NFC6K-V3.00/0

*Genie CCTV reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.*

DATASHEET