




Product Datasheet

02 Recessed Spots Fixed LED>The COB Bathroom IP44 Range

10107W/AL/W

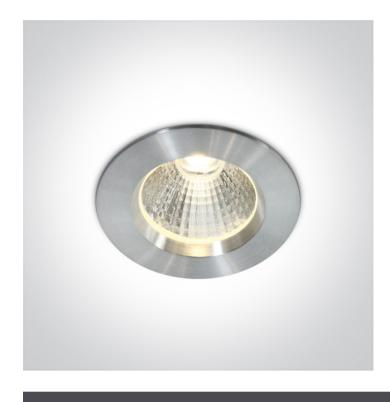

7W LED recessed spot, IP44, suitable for installation inside bathrooms.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads










Dimensions





77mm

Gallery



Physical Specification

Item Group	
Family	
Order Code	
Colour	
Material	
Diffuser Material	
Shape	

02 Recessed Spots Fixed LED

The COB Bathroom IP44 Range

10107W/AL/W

Aluminium

Aluminium

Acrylic

Circular

Height	77mm
Diameter	85mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	95mm
Indoor	Yes
Adjustable	No
lectrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
Cable Length	0
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	
Power(Watts)	6W
IP Rating	IP44
Light Source	LED built in
LED Type	COB

LED Brand	Cree
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4-8W
Power Factor	0,5
Constant Current	Yes
700mA	5,6-11,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Protection	Short Circuit / Overheat Protection
llumination Data	
Colour Temperature	3000K
Lumen Output	507lm
Light Efficiency	72,42lm/W
CRI	80
Beam Angle	30°
Illumination Diagram	

Packing Info


 Box Weight
 0,30kg

 Pcs/Carton
 30

 Barcode
 5291889036364

 HS Code
 9405409900

Energy Label



Certification & Warranty

Warranty	2 Years
Average Lifetime	50000hrs
Weee Directive	Yes

switch to one light!

