

08 Downlights Adjustable LED>The COB Retro Downlights

## 11115C/W/C



15W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

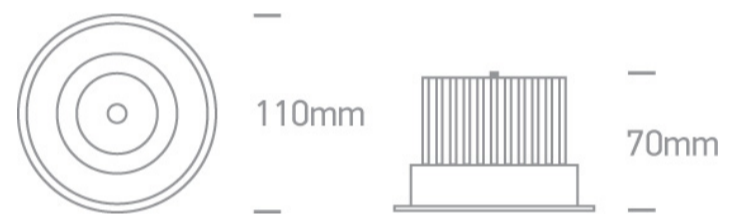

### Gallery






### Physical Specification


Item Group	08 Downlights Adjustable LED
Family	The COB Retro Downlights
Order Code	11115C/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	70mm

Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes
Adjustable	1 Direction


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	39V
Safety Class	
Power(Watts)	13,65W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Sanan
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,5-15W
Power Factor	0,9
Constant Current	Yes
350mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

#### Illumination Data

Colour Temperature	4000K
Lumen Output	1200lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	38°
Illumination Diagram	

#### Packing Info

Box Length	12,5cm
Box Width	12,5cm
Box Height	10cm
Box Weight	0,45kg

Pcs/Carton

30


Barcode

5291889042235

HS Code

9405409900

## Energy Label

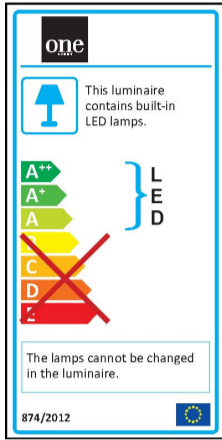

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

