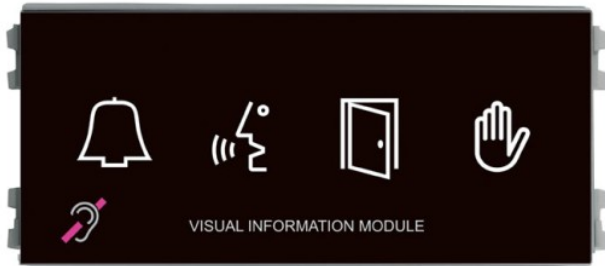


ONE TO ONE V MODULE SKYLINE

**Reference:** 7448

The OneToOne module has 4 LED icons showing the panel status.

These icons symbolize:

- Call
- Conversation
- Door Opening
- Channel busy.

NOTE: The «Channel busy» icon is only shown in VDS systems....

DESCRIPTION

The OneToOne module has 4 LED icons showing the panel status.

These icons symbolize:

- Call
- Conversation
- Door Opening
- Channel busy.

NOTE: The «Channel busy» icon is only shown in VDS systems.

Possibility of connection in the different FERMAX Systems.

Module for fitting to New SKYLINE Panel frame.

TECHNICAL SPECIFICATIONS

This module is compatible with the following systems: 4+n, VDS, BUS2 and MDS Digital. The connectors' cabling will depend on the system chosen.

Model Dimensions.

- V module: 105,2x47,5 mm (width-height):

Power supply: the module has no power supply terminal and runs off the amplifier or electronic directory to which it is connected.

- In VDS Systems, the module is powered at 18 Vdc.
- In BUS2 Systems, the module is powered at 24 Vdc.
- In MDS-Digital Systems, the module is powered at 12 Vdc.
- In 4+n Systems, the module is powered at 17 Vdc.

Consumption in standby: 15 mA + 20mA active icon.

Operating temperature: -10°C to +40°C.

Weight: 0,1758 kg

Size of product when packed: 13,5x10x6 cm

EAN 13: 8,4243E+12