



DDI602AM-F2

Outdoor Dual Technology/AM detector 10.587 GHz 10/20/30m selectable

Outdoor Dual Technology motion sensor with AntiMask functionality

DDI602AM-F2 Outdoor Dual Technology/AM Detector is an outdoor motion detector and alarm trigger using two independent passive infrared elements plus a microwave sensor module. In addition it has an Anti-Masking functionality achieved by active infrared technology that will detect masking events as required by the EN Grade III standard. DDI602AM-F2 delivers precise, reliable presence detection.


Easy and quick to install

Programmable options include a LED enabling/disabling function, a variable pulse count and a choice of three detection ranges: 10 m, 20 m, 30 m.

The motions sensor includes jumpers that let you configure internal end-of-line (EOL) resistor values, when EOL resistors are required. You even have the feature to use the triple EOL resistor values configuration in order to have different EOL resistor values for a detector fault and a masking event. Moreover, the integral dual-axis tilt sensor allows -45° to +45° of pan and +45° of tilt, which increases the speed of the outdoor installation and provides incredibly accurate aiming of the detection pattern.

Aesthetics and hidden sensor module

The design has a neat and professional appearance that gives no visible indication of the orientation of the detector head and totally hides the wiring.

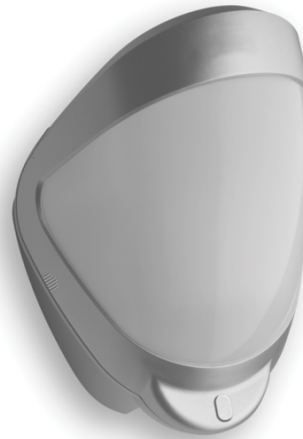

Standard Features

- Electronic range setting: 10/20/30m
- Attractive aesthetics
- 10 to 70° detection angle
- -45° to +45° pan and +45° tilt for flexible install
- Sensor module is hidden
- Built-in EOL resistors with triple EOL configuration capability
- High dust & humidity resistance (IP55)
- 5 years warranty
- EN Grade III certified

DDI602AM-F2

Outdoor Dual Technology/AM detector 10.587 GHz 10/20/30m selectable

Specifications

Detection Area	Programmable: 10 m, 20 m or 30 m
Coverage	10 to 70° detection angle, 30 x 24 m coverage max.
Adjustment	-45° to +45° pan, +45° tilt
Fresnel lens	28 zones for each detection element, which can be masked with the curtain sliders
Customized optics	Double silicon shielded quad element eliminates 50,000 lux of white light
Outputs	Silent, solid state, magnetically immune. Microwave AND PIR.
N/O	Volt free relay, signal contact 24 VAC/DC at 50 mA with an integral 25 Ohm series resistor. Alarm time 5 seconds.
N/C	Volt free relay, signal contact 24 VAC/DC at 50 mA with an integral 25 Ohm series resistor. Alarm time 5 seconds.
Fault/Mask	Volt free relay, signal contact 24 VAC/DC at 50 mA with an integral 25 Ohm series resistor.
Power input	10 to 15 VDC
Current	21 mA (12 V nominal)
Pulse count	1 or 2
Temperature compensation	Analogue (thermistor) and digital sensitivity adjustment
Control	Digital microprocessor with non-volatile memory
Operating/storage temperature	-30 to +65°C
Housing	High impact ABS plastic with HDPE cover, UV stabilized
Dimensions, W x H x D	125 x 175 x 130 mm
Weight	365 g net, 551 g gross
Microwave module	10.587 GHz (Greece, Italy, Thailand, UAE, UK)
Mounting height	Variable up to 6 m / Optimum height 3 m for full range
Environmental testing	EN 50130-5, Class IV certified
Security approval	EN Grade III certified

Ordering Information

Part No.	Description
DDI602AM-F2	Outdoor Dual Technology/AM detector 10.587 GHz 10/20/30m selectable
DI601-WT	Walk tester for DI601 and DDI602 series

